



PRODUCT DESCRIPTION


1. AFTER YOU OPEN THE PACKAGE, PLEASE CHECK THE PHYSICAL OBJECT AND THE CORRESPONDING ACCESSORIES.
2. THE PICTURE IS ONLY FOR REFERENCE, PLEASE MAKE THE OBJECT AS THE STANDARD.
3. ACCESSORIES ARE SUBJECT TO CHANGE WITHOUT AFFECTING USE, NO FURTHER NOTICE.
4. THANK YOU FOR CHOOSING OUR PRODUCTS.

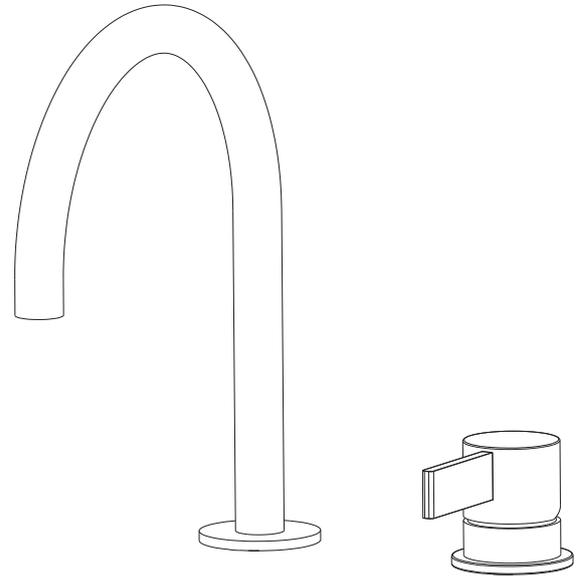

PARTS LIST

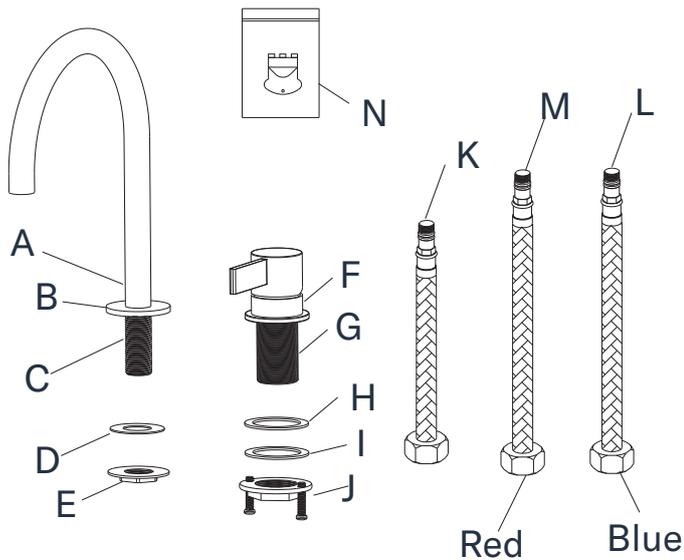


DIMENSIONAL DRAWING

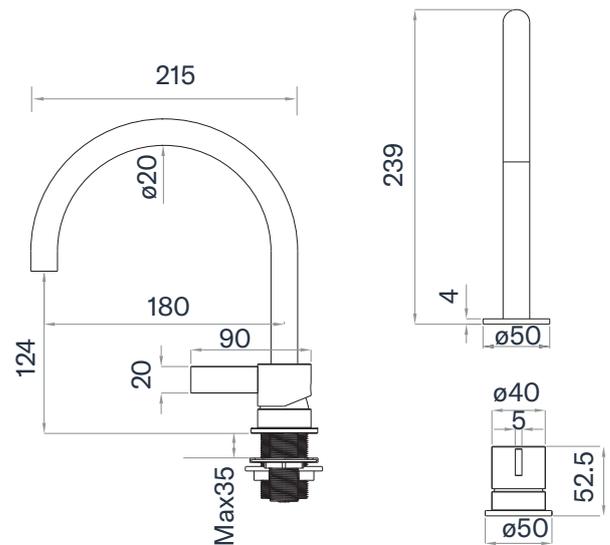


TECHNICAL PARAMETER

- MAXIMUM WORKING PRESSURE OF 6 BAR.
- THE RECOMMENDED WORKING PRESSURE IS 3 BAR (IF THE WATER PRESSURE EXCEEDS 6 BAR, IT IS RECOMMENDED TO INSTALL A PRESSURE REDUCING VALVE).
- TO ENSURE OPTIMAL OPERATION OF THE PRODUCT, THE INLET PRESSURE (HOT AND COLD WATER) MUST BE BALANCED, WITH A PRESSURE DIFFERENCE NOT EXCEEDING ± 0.5 BAR.

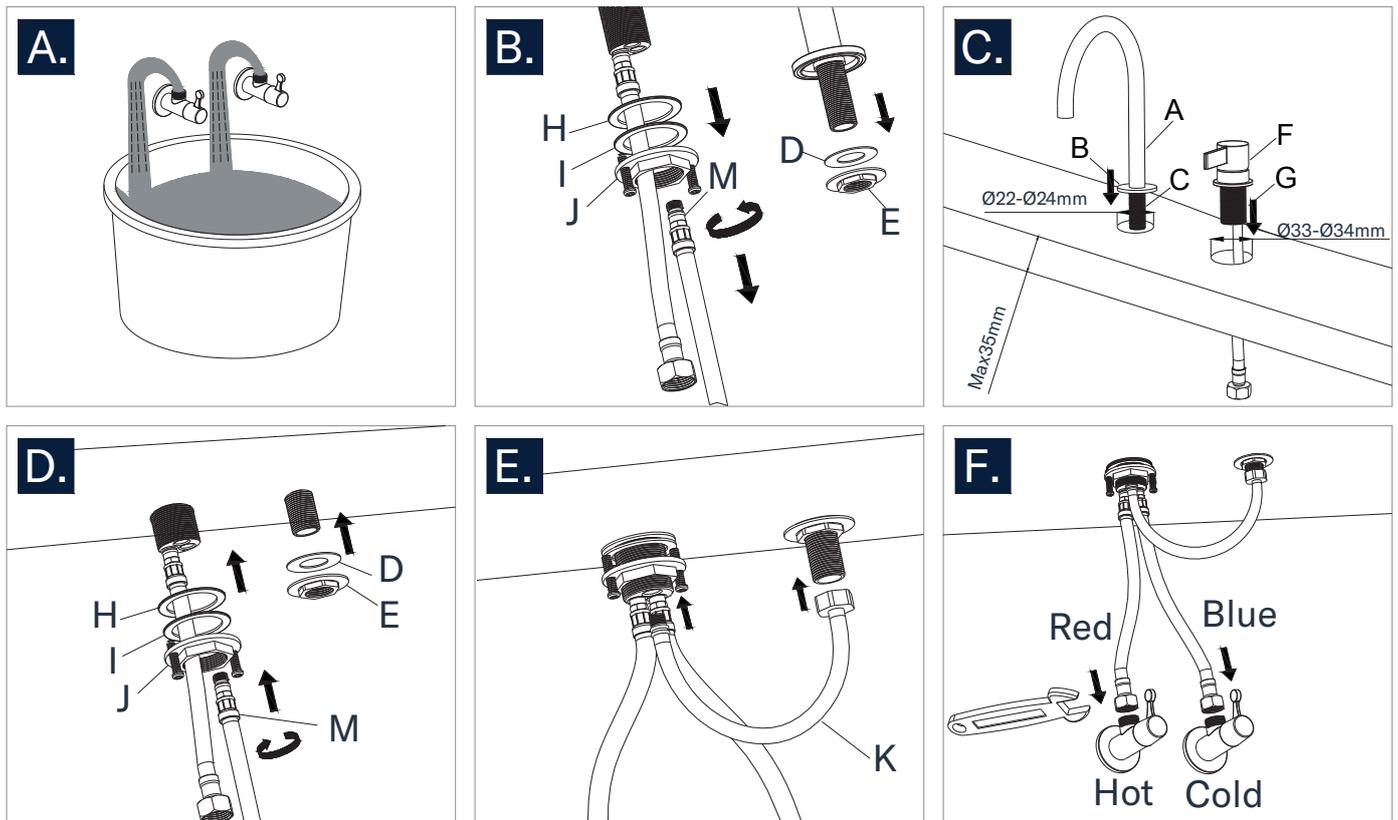

CLEAN AND CARE

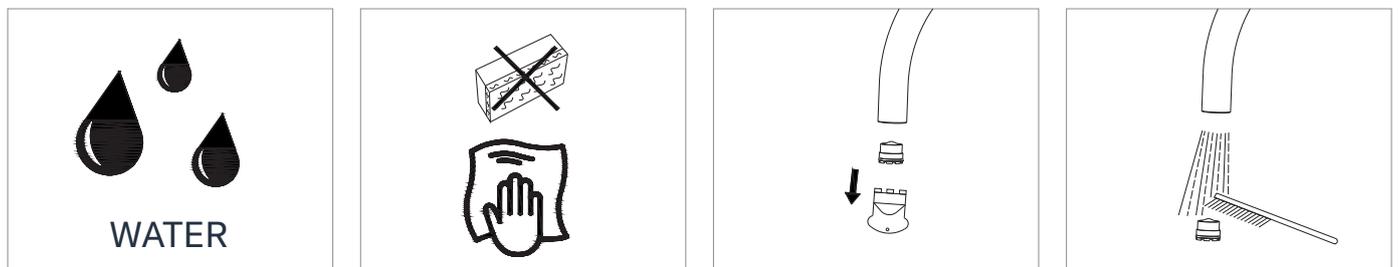

TO KEEP THE SURFACE OF THE FAUCET BRIGHT AND CLEAN, PLEASE CLEAN THE FAUCET REGULARLY:

1. PLEASE WASH WITH CLEAN WATER.
2. PLEASE WIPE WITH A SOFT CLOTH, DO NOT WIPE WITH HARD OBJECTS.
3. DO NOT USE DETERGENT CONTAINING COARSE PARTICLES SUCH AS DETERGENT POWDER OR POLISHING POWDER OR NYLON BRUSH NO. IN ORDER TO AVOID ABRASION OF THE PRODUCT.
4. UNDER NORMAL WATER PRESSURE, WHEN THE WATER OUTPUT DECREASES, USE A SMALL BRUSH TO CLEAN (REFER TO THE PICTURE).